

eLM

Technical data	eLM 5.6
Max. layer	1500 x 1800 mm
Max. stack height	2200 mm under stripper plate
Max. stack weight	900 KG
Electrical usage	16 kW
Work on pallets	Yes
Work on bottom sheets	Yes
Exit height	100 - 500 mm
Entry table height	920 mm
Pit dimension	L x W x D 2400 x 2900 x 1900 mm



FEEDERS



PALLETISERS



SEPARATORS



SERVICE



eLM




+31 (0)497 362500
info.europe@alliancellc.net
Muggenhool 3, 5531 RZ Bladel
The Netherlands

www.alliancellc.net

Intelligent Productivity

www.alliancellc.net

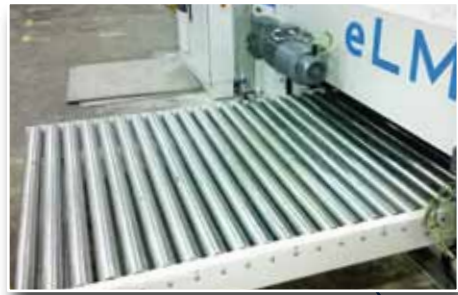

Pallet entry from behind or side
As option available.



PalletHandler option
To deliver pallets to the eLM.



All electric
And therefore smooth movements.

Lift equipped with plastic belt
For stable transport.



Main control panel
With an integrated user-friendly touch screen.



Ball table option
(Stainless steel table is standard).



Load compression
To generate a more stable stack.



Bundle conveyors option
To feed bundles to eLM.



Auto stripper cycle ball
For 1 and 2 up orders.

