

eSBF

Technical data	eSBF 1300x2100	eSBF 1700x2800	eSBF 1700x3200
Max. stack height	2000/2400	2000/2400	2000/2400
Max. stack weight	2000	2000	2750
Block height	50-400	50-400	50-400
Min sheet	250x400	250x400	250x400
Max sheet	1300x2100	1700x2850	1700x3250
Max speed (s/m)	upt to 400	upt to 400	upt to 400
Inverter option	x	x	x



eSBF



FEEDERS




PALLETISERS




SEPARATORS




SERVICE

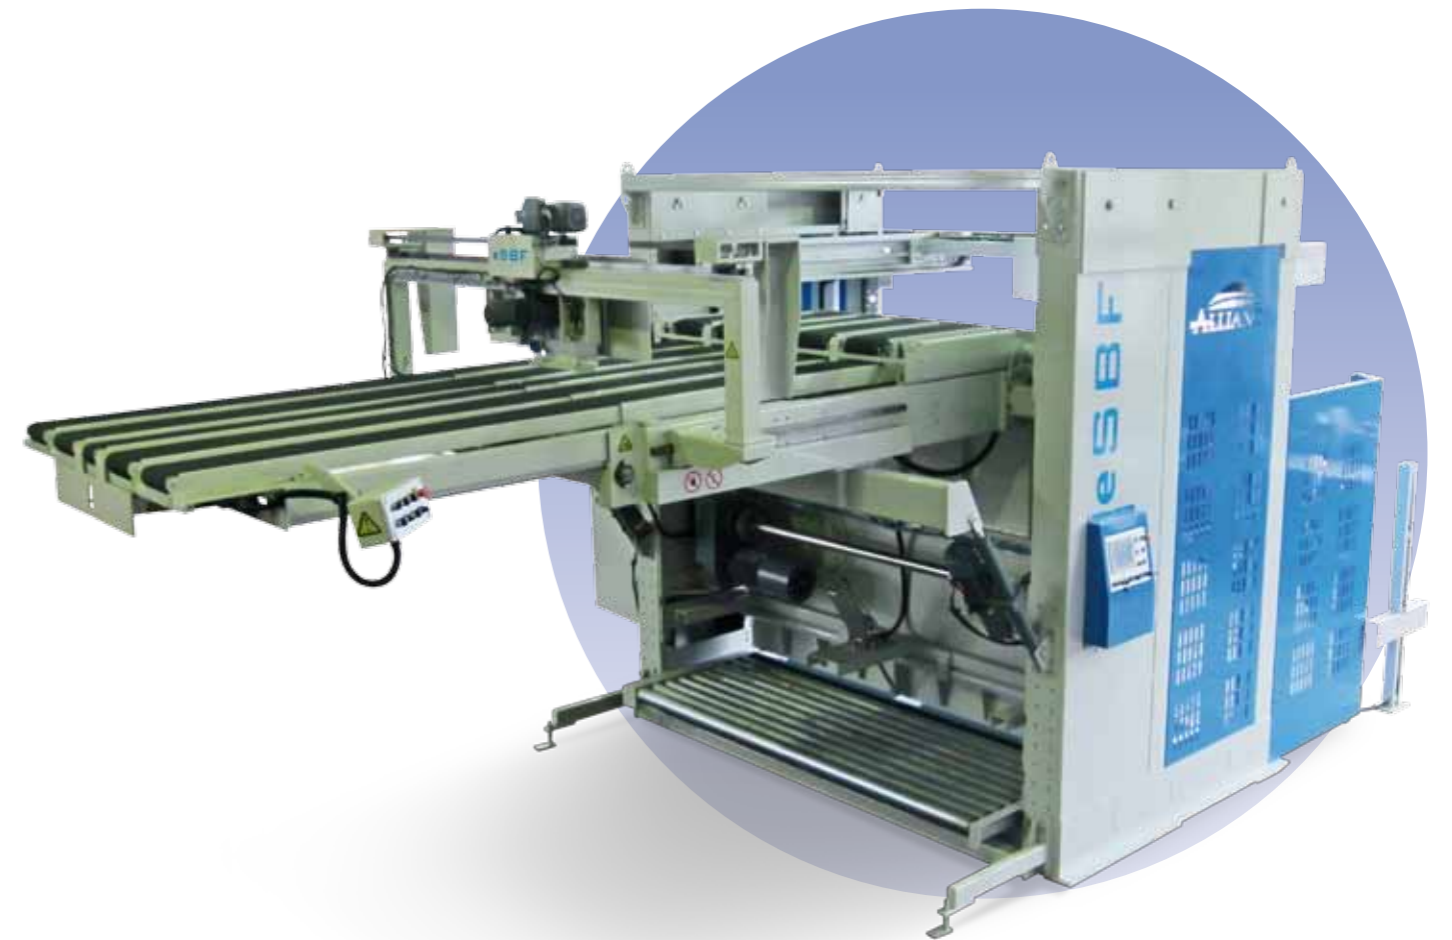

+31 (0)497 362500
info.europe@alliancellc.net
Muggenhool 3, 5531 RZ Bladel
The Netherlands
www.alliancellc.net

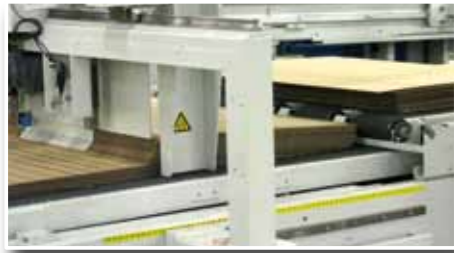

Moveable gate
For perfect shingled sheets. Adjustable length and width.

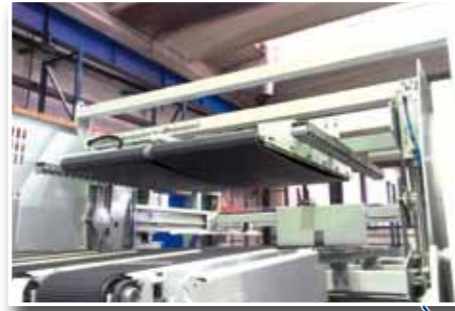

Option K
Inverter.
For rotating bundles.
Including last sheet cart.




Option CS
Continuous shingle. A second driven conveyor to provide a constant stream of shingled cardboard. With movable gate.



Pusher
With an automatic pusher nose and separation plate. No more damaged sheets.



Lift / trapdoor
A laser-controlled heavy duty lift with a trapdoor for pallets or (optional) waste sheets.

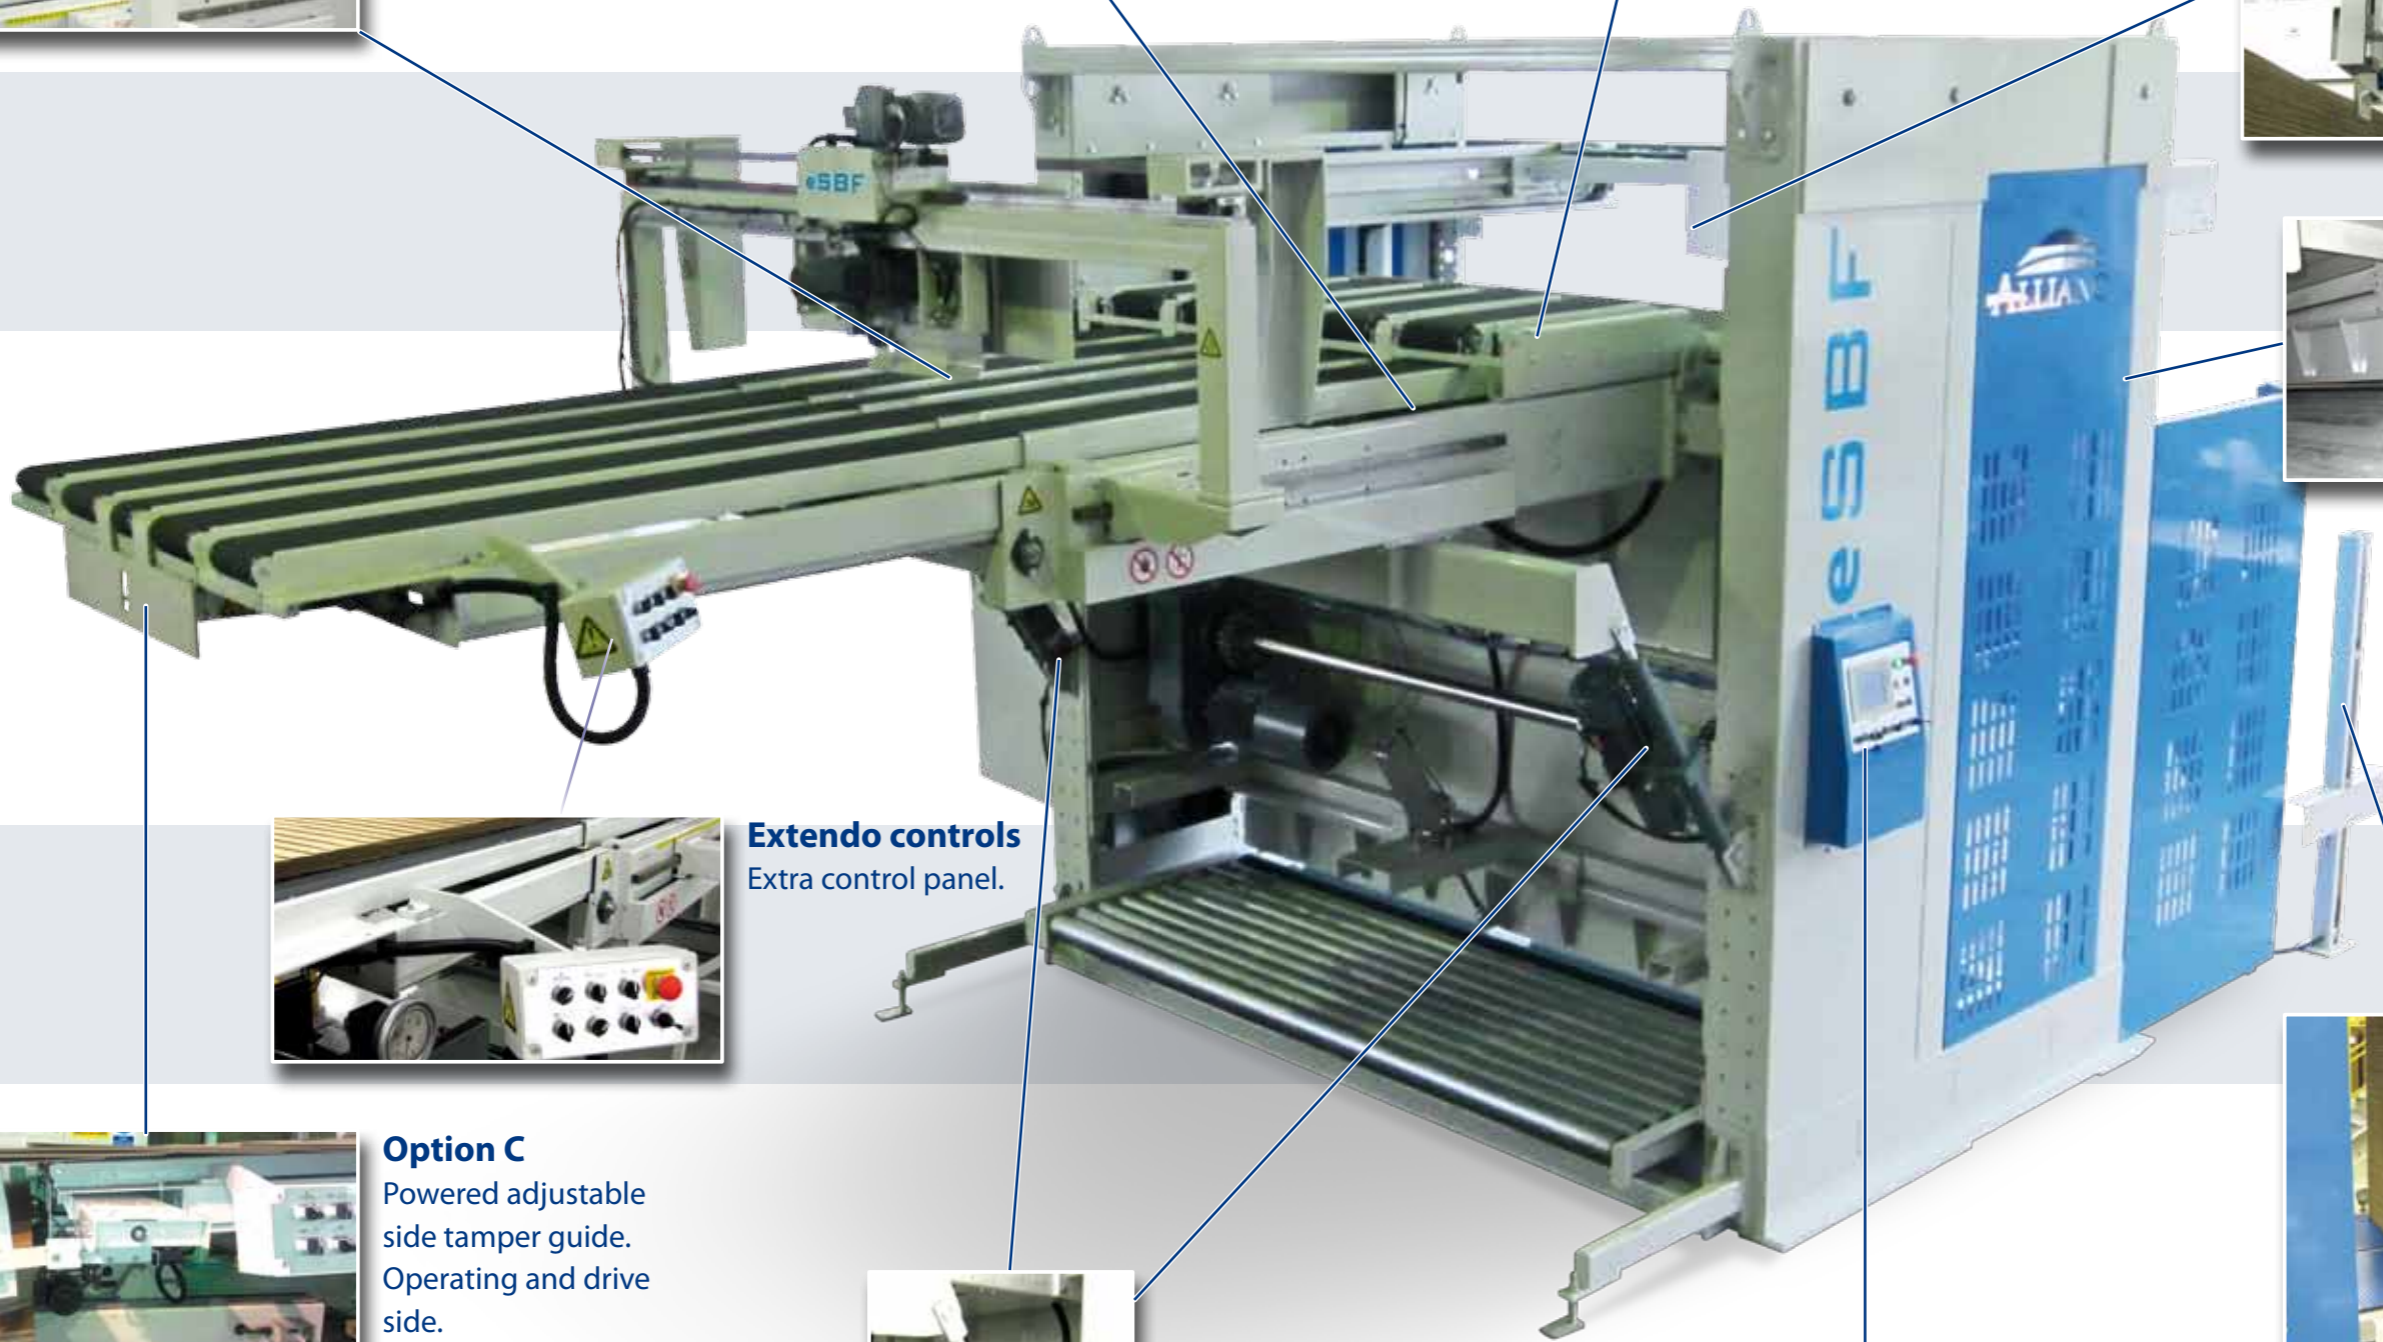

Extendo controls
Extra control panel.



Option C
Powered adjustable side tamper guide. Operating and drive side.



Backtamper
For perfect positioning in the hopper.



Lifting units
For save, strong and controlled lifting of the extendo.



Entrance control
For save working near the exit conveyor.



Main control panel
With an integrated touch screen.